



VIRGINIA


TECHNICAL SPECIFICATION



This Range

Beautiful range of porcelain tiles, suitable for interior & exterior applications, in 10mm & 20mm thickness.


Suitable for:



Exterior



Heavy Footfall



Pool Edging




Stairs

Sizes

1000 x 1000 x 8.5mm rectified natural
 600 x 600 x 10mm rectified natural
 610 x 610 x 10mm unrectified natural
 405 x 610 x 10mm unrectified natural
 405 x 405 x 10mm unrectified natural
 203 x 405 x 10mm unrectified natural
 203 x 203 x 10mm unrectified natural
 200 x 200 x 10mm grip
 1000 x 1000 x 20mm rectified grip
 ethnic decor c 1000 x 1000 x 20mm rectified natural
 600 x 600 x 20mm rectified grip
 ethnic decor c 1000 x 1000 x 20mm rectified natural
 mosaic 304 x 304 x 10mm natural
 mosaic 3D 3'5 x 345 x 10mm natural
 skirting 610 x 65mm x 10mm natural
 skirting 405 x 75 x 10mm natural

Colours



Black



Mosaic



Grey




Ethnic Decor Warm




Cream



Ethnic DecorbCold



Sand



Mosaic 3D

Technical Details - 10mm & 20mm

Technical Features	Test Method	Required Values	Average Values
Water Absorption	ISO 10545-3	≤ 0,5%	Compliant
Modulus of rupture	ISO 10545-4	≥ 35 N/mm ²	35 N/mm²
Breaking Strength	ISO 10545-4	≥ 1300 N	Compliant
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm ³	Compliant
Linear Thermal Expansion	ISO 10545-8	No provision	$\alpha \leq 7.1 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$
Stain Resistance	ISO 10545-14	Classe / Class 3 Min.	Compliant
Chemical Resistance (*)	ISO 10545-13	As indicated by manufacturer	LA-HA
Frost Resistance	ISO 10545-12	No alteration	Resistant
Slip Resistance	BS 7976:2002	Declared value	R10, R11
Thickness	ISO 10545-2	+/-0.5mm	Compliant

Recommended minimum joint (**)		RECT (Interior)	2mm (RECT) circa/approx
--------------------------------	--	-----------------	--------------------------------

(*) Excluding hydrofluoric acid and its derivatives. (**) The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards.

Packaging Details

Size	Pz/Box	Kg/Box	Mq/Box	Box/Pal	Kg/Pal	Mq/Pal
2780 x 1200 x 6mm rectified	1	47	3.366	18	846	60.048
1200 x 1200 x 9mm rectified	1	31.8	1.44	36	1017.60	46.08
600 x 1200 x 9mm rectified	2	31.8	1.44	32	1144.8	51.84
600 x 600 x 9mm rectified	4	31.8	1.44	32	1017.60	46.08
600 x 300 x 9mm rectified	9	36	1.62	32	1152	51.84
mosaic 300 x 300 x 9mm rectified (36 piece)	4	7.5	0.36	60	450	21.6
chevron 540 x 95 x 9mm rectified	8	9.215	0.4104	64	589.76	26.266
linear 600 x 70 x 9mm rectified	16	13.775	0.672	40	551	26.88
square 70 x 70 x 9mm rectified	16	1.615	0.0784	456	736.44	35.75
skirting 600 x 100 x 9mm rectified	12	14.5	0.72	60	870	43.2




Black

Grey external






Cream with wall in 3D mosaics

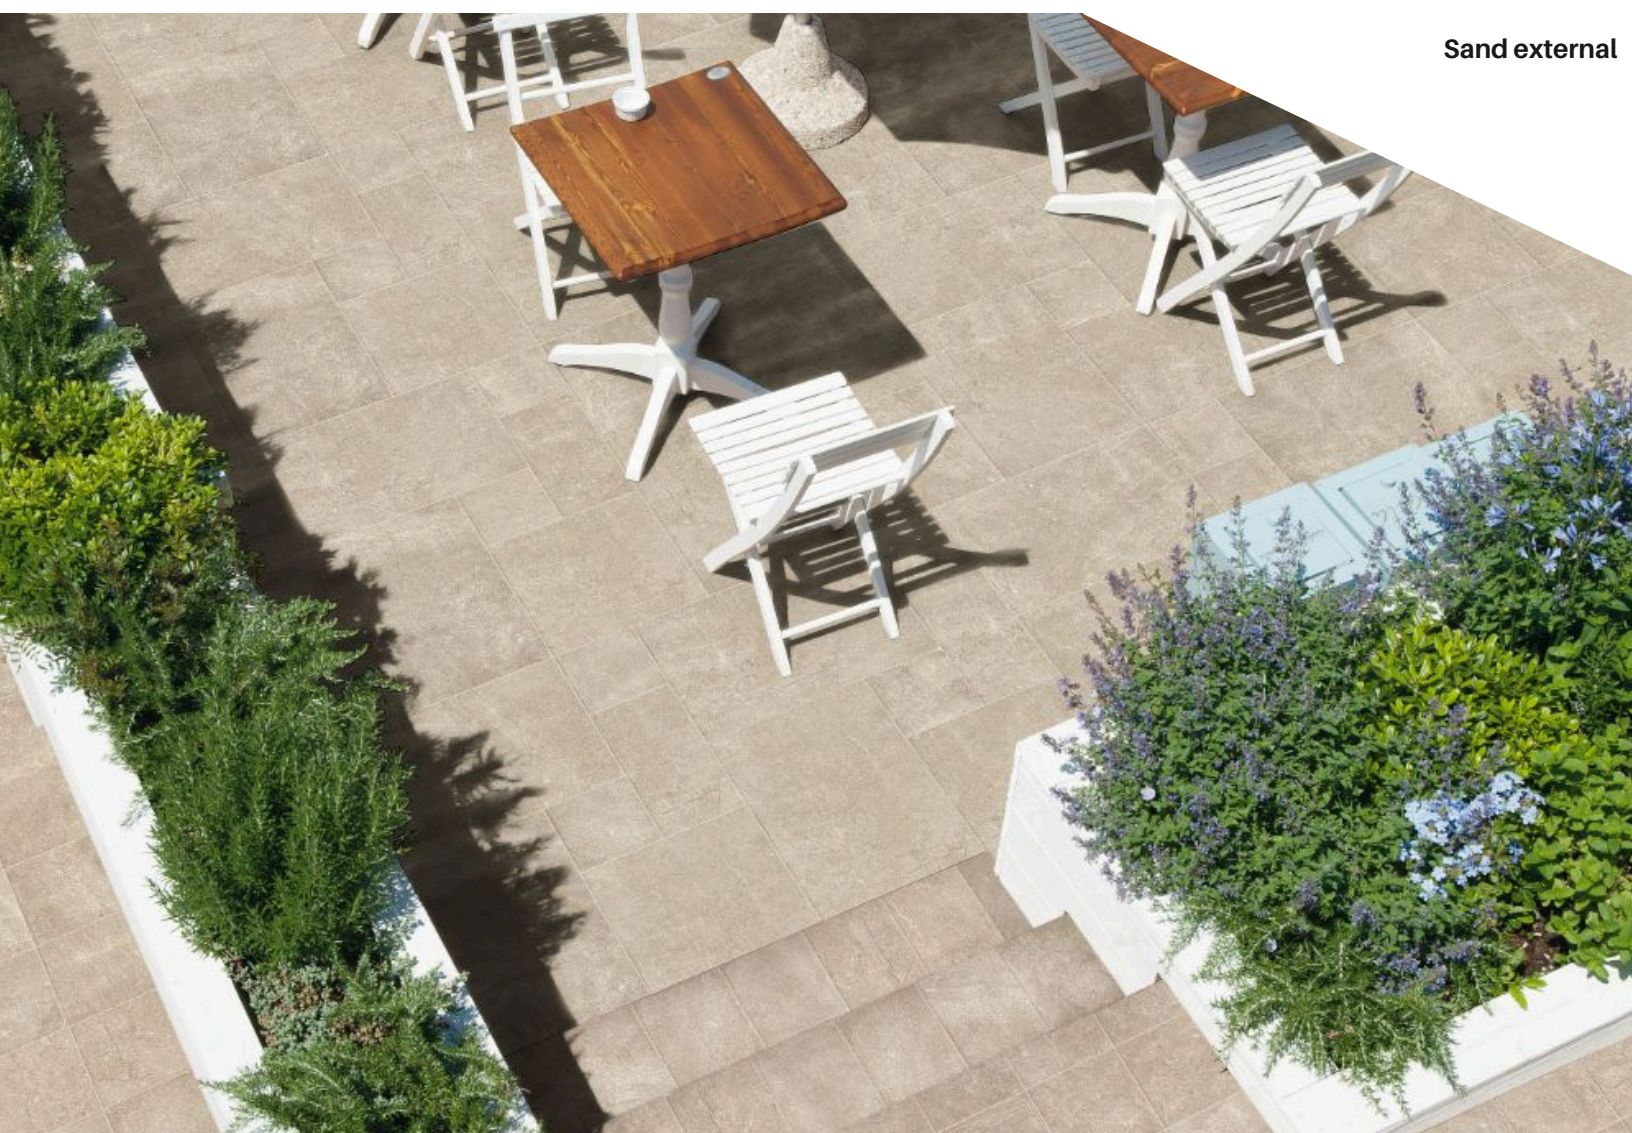

Sand external

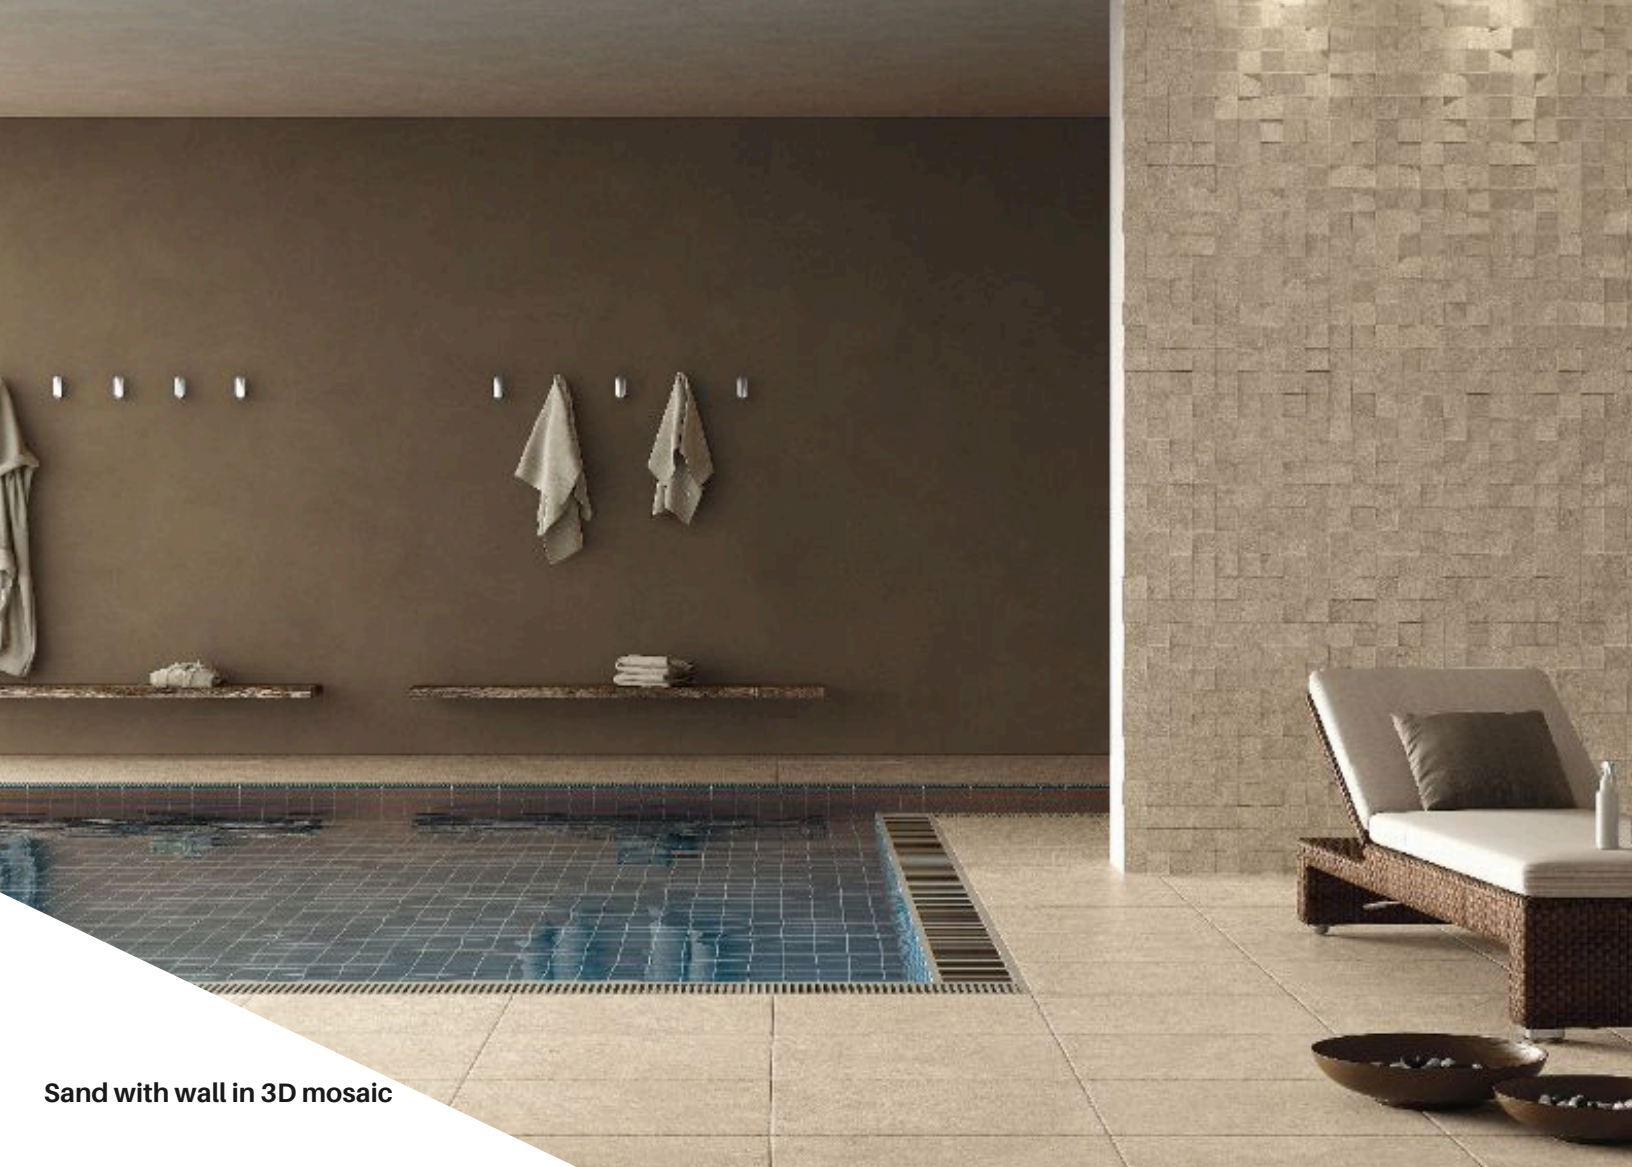

Sand with wall in 3D mosaic



Cream external with Ethnic Decor



204 Duggins Lane, Tile Hill, Coventry,
CV4 9GP
02475 092 859
www.keystoneco.co.uk

