




VIVE

TECHNICAL SPECIFICATION

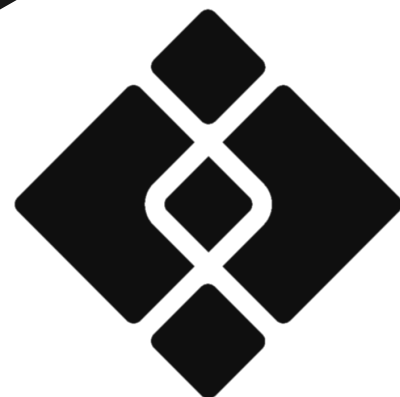


This Range

Beautiful range of porcelain tiles, suitable for interior applications, in 8.5mm thickness.


Suitable for:



Heavy Footfall



Pool Edging











Stairs

Sizes

1195 x 595 x 8.5mm rectified natural
 595 x 595 x 8.5mm rectified natural
 595 x 295 x 8.5mm rectified natural
 295 x 295 x 8.5mm rectified natural
 600 x 300 x 8.5mm unrectified natural
 150 x 75 x 8.5mm rectified natural
 300 x 75 x 8.5mm rectified natural
 basketweave white & black 315 x 315 x 8.5mm rectified natural
 hex 294 x 293 x 8.5mm rectified natural
 panel bianco & nero 337 x 337 x 8.5mm rectified natural
 quadrant cold 260 x 260 x 8.5mm rectified natural
 mosaic 300 x 300 (50 x 50mm) rectified natural
 skirting 600 x 70 x 8.5mm unrectified natural
 skirting 595 x 70 x 8.5mm rectified natural
 skirting 1195 x 70 x 8.5mm rectified natural

Colours

	White		Fusion
	Arabesque		Oro in mosaic
	Grey		Quadrant Cold/ Warm
	Black in Hex mosaic		Basketweave Fusion, Grey, Oro White, Black, Grey

Technical Details - 8.5mm

Technical Features	Test Method	Required Values	Average Values
Water Absorption	ISO 10545-3	≤ 0,5%	Compliant
Modulus of rupture	ISO 10545-4	≥ 35 N/mm ²	Compliant
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm ³	Compliant
Linear Thermal Expansion	ISO 10545-8	No provision	α ≤ 7.1x10⁻⁶ °C⁻¹
Stain Resistance	ISO 10545-14	Classe / Class 3 Min.	Compliant
Chemical Resistance (*)	ISO 10545-13	As indicated by manufacturer	Compliant
Frost Resistance	ISO 10545-12	No alteration	Resistant
Slip Resistance	BS 7976:2002	Declared value	R10 Natural
Thickness	ISO 10545-2	+/-0.5	Compliant

Recommended minimum joint (**)		RECT (Interior)	2mm (RECT) circa/approx
--------------------------------	--	-----------------	--------------------------------

(*) Excluding hydrofluoric acid and its derivatives. (**) The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards.

Packing Details

Size	Pz/Box	Kg/Box	Mq/Box	Box/Pal	Kg/Pal	Mq/Pal
1192 x 595 x 8.5mm Rectified	2	35.11	1.43	27	947.97	38.71
595 x 595 x 8.5mm rectified	3	22.41	1.08	40	880	43.2
600 x 300 x 8.5mm unrectified	6	22	1.08	48	1075.68	51.84
595 x 295 x 8.5mm rectified	6	21.91	1.08	48	1051.68	51.84
295 x 295 x 8.5mm rectified	11	22.45	0.99	40	1077.60	47.52
300 x 75 x 8.5mm	17	7.91	0.38	84	664.44	31.92
300 x 75 x 8.5mm	50	11.61	0.57	76	882.36	43.32
mosaic 300 x 300 x 8.5mm rectified (36 piece)	8	15.24	.55	42	640.08	30.24
Hex 294 x 293 x 8,5mm	8	14.50	0.63	42	609	26.46
Quadrant warm & cold 260 x 260 x 8.5	8	11.28	0.54	40	451.20	21.6
Basketweave 31.5 x 31.5 x 8.5mm	8	16.47	0.68	42	691.71	28.56
Panel 337 x 337 x 8.5mm	8	18.82	0.92	40	752.8	36.80
Skirting 1195 x 70 x 8.5mm	6	8.5	54	50	507	32.4
Skirting 595 x 70 x 8.5mm	15	14	-	40	-	560



Vive White

Vive Grey





Vive Fusion

Vive Black





204 Duggins Lane, Tile Hill, Coventry,
CV4 9GP
02475 092 859
www.keystoneco.co.uk

